

Datasheet

→ OKJNSGL+SGLR-24V

09/19/2025



Technical data

Illuminated buzzer

Type	OKJNSGL+SGLR-24V
Series	OKTRON®JUWEL
Rubric	Buzzer
Approvals	CE, UKCA



→ General data

Design	Square
Illumination	Yes
Labelling option	No
Operating temperature	-20 °C ... 60 °C
Panel cut-out	23 x 23 mm
Mounting depth	49 mm
Colour	Black/red
Front bezel colour	Black
Weight	17.25 g
Degree of protection front	IP65
Signal frequency	3,5 ± 0,5 kHz
Signal volume	max. 85 dB 10 cm, 24 V max. 75 dB 10 cm, 12 V

→ Electrical data

Supply voltage 12 V ... 24 V AC/DC


Supply operating current abt. 30 mA

→ Mechanical data

Connection Faston terminals 2.8 mm x 0.8 mm

Technical drawings

→ Dimensional drawing

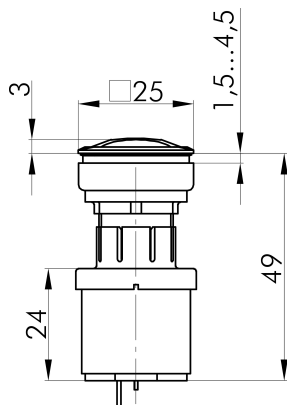

→ Cutout dimensions

