

Datasheet

➔ **PXM4S2302-0000** 

04/15/2025



Equipment

Pos.	Name	Type	Nameplate	Lens
4	FRVKOO	Emergency-stop		
3	SSWWBII	Selector Switch 3-Position		
2	SSWTLI	Pushbutton	BSRR226	T22RRBL
1	SSWTLI	Pushbutton	BSRR202	T22RRRT



Technical data

<i>Rated insulation voltage U_i</i>	30 V AC/DC
<i>Continuous thermal current I_{th}</i>	1 A
<i>Rated operating voltage U_e</i>	30 V AC/DC
<i>Rated operating current I_e</i>	1 A
<i>Class of Protection</i>	IP65
<i>Operating temperature</i>	-25°C ... 70°C
<i>Storage temperature</i>	-40°C ... 80°C
<i>Connections</i>	M12 plug, A-coded 5-poles/12-poles
<i>Surge voltage category</i>	2
<i>Degree of pollution</i>	II
<i>Approvals</i>	CE, UL

➔ PXM4Z - Housing

Series	proboxx®
Material	PA
Color bottom part	dark grey
Color top part	black
Shock resistance	IK06
Torque mount	0.7 ±0.1 Nm (for countersunk screws according to DIN 7991/ISO 10642)
Torque M12	max. 0.4 Nm

➔ FRVKOO - Emergency stop button

Series	SHORTRON®
Front bezel color	yellow
Release	twist release, left/right
Mechanical life	50,000 Switching cycles
Electrical life	50,000 Switching cycles
Contact type	2 NC
Conditional short-circuit I _q	1,000 A
Rated impulse withstand voltage U _{imp}	2.5 kV
Short circuit means (recommendation)	Safety fuse 1A gG
Positive opening contact	according to EN60947-5-1, appendix K



➔ SSWWBII - Selector button

Series	SHORTRON®
Front bezel color	schwarz
Switching position	• -60° latching • 0° latching • 60° latching
Mechanical life	30,000 Switching cycles
Electrical life	30,000 Switching cycles
Contact type	2 NO




➔ SSWTLI - Push button

Series	SHORTRON®
Front bezel color	schwarz
Mechanical life	1,000,000 Switching cycles
Electrical life	1,000,000 Switching cycles
Contact type	1 NO
Illuminant	LED integrated
Illumination	LED, 3 mm, 24 V DC, 14 mA



Accessories

BSRR226 [↗](#) T22RRBL [↗](#)



➔ SSWTLI - Push button

Series	SHORTRON®
Front bezel color	schwarz
Mechanical life	1,000,000 Switching cycles
Electrical life	1,000,000 Switching cycles
Contact type	1 NO
Illuminant	LED integrated
Illumination	LED, 3 mm, 24 V DC, 14 mA




Accessories

BSRR202 [↗](#) T22RRRT [↗](#)




Mounting

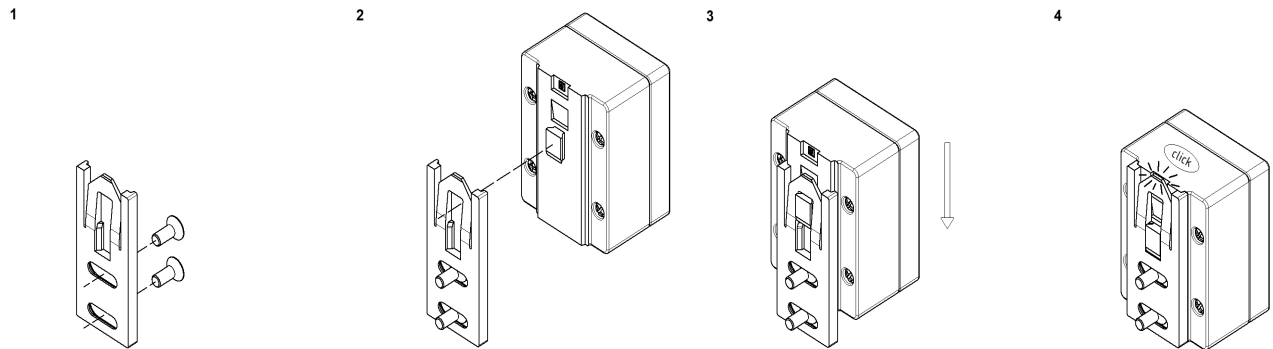

The mounting bracket is part of the delivery, the fixing material (screw, slot nuts) is not included. Please use M5 countersunk screws acc. to DIN 7991/ISO 10642 of appropriate length. The tightening torque for the screws to fix the mounting bracket is $0.7 \pm 0.1 \text{ Nm}$.

Dimensional drawing

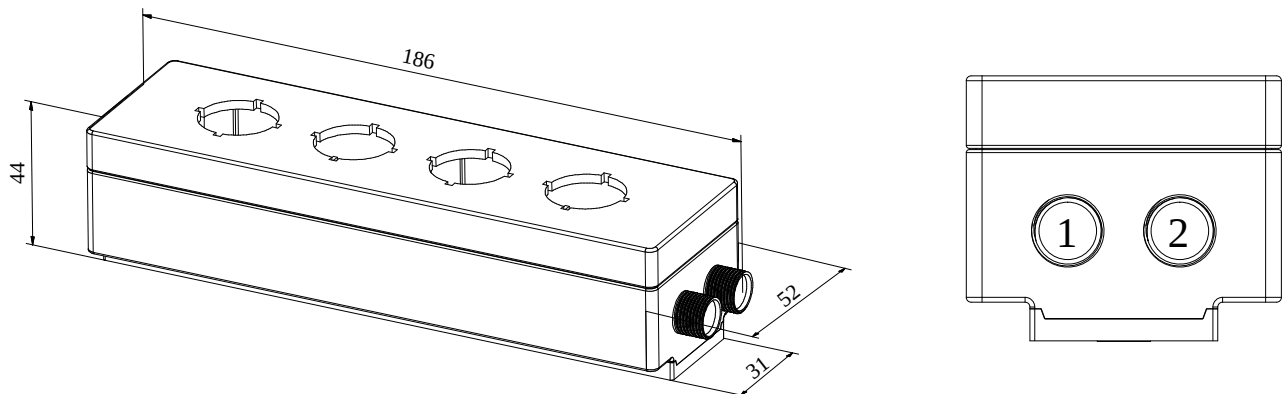

Pin assignment

Position	Connection	Contact	Pin	Cable color	Connection designation
4 FRVKOO	2	NC	1	 Brown	11
			2	 White	12
		NC	3	 Blue	21
			4	 Black	22
3 SSWWBII	1	NO	9	 Red	13
			10	 Violet	14
		NO	11	 Grey  Pink	23
			12	 Red  Blue	24
2 SSWTLI	1	NO	5	 Pink	13
			6	 Yellow	14
		LED	7	 Black	X1 (+)
			8	 Grey	X2 (-)
1 SSWTLI	1	NO	1	 Brown	13
			2	 Blue	14
		LED	3	 White	X1 (+)
			4	 Green	X2 (-)

Connection 1: 12 poles (left)
Connection 2: 5 poles (right)

Images



Labeling

Position	Alignment	Left	Center	Right
4	horizontal	-	EMERGENCY STOP	-
3	vertical	HOLD	-	START