

Datasheet

➔ **PXM4S2306-0000** [↗](#)

07/24/2026



Equipment

Pos.	Name	Type	Nameplate	Lens
4	SSWTLI	Pushbutton	BSRR203	T22RRGN
3	SSWTI	Pushbutton	BSRR204	T22RRRT
2	SSWTI	Pushbutton	BSRR101	T22RRKL
1	SSWTLI	Pushbutton	BSRR102	T22RRGB



Base Data

<i>Rated insulation voltage U_i</i>	30 V AC/DC
<i>Continuous thermal current I_{th}</i>	1 A
<i>Rated operating voltage U_e</i>	30 V AC/DC
<i>Rated operating current I_e</i>	1 A
<i>Class of Protection</i>	IP65
<i>Operating temperature</i>	-25°C ... 70°C
<i>Storage temperature</i>	-40°C ... 80°C
<i>Connections</i>	M12 plug, A-coded 12-poles
<i>Surge voltage category</i>	2
<i>Degree of pollution</i>	II
<i>Approvals</i>	CE, UL

→ PXM4E - Housing

Series	Proboxx®
Shock resistance	IK06
Torque mount	0.7 ±0.1 Nm (for countersunk screws according to DIN 7991/ISO 10642)
Torque M12	max. 0.4 Nm
Color bottom part	Dark grey
Color top part	Black
Material	PA
Rubric	Housing

→ SSWTLI - Pushbutton

Series	SHORTRON®
Rubric	Pushbutton
Description	Illuminated pushbutton
Contact type	1NO
Mechanical lifetime	1,000,000 switching cycles



Further technical data on this item can be found in the product data sheet: [SSWTLI](#)

Accessories

[T22RRGN](#) [BSRR203](#)



→ SSWTI - Pushbutton


Series	SHORTRON®
Rubric	Pushbutton
Description	Pushbutton
Contact type	1NO
Mechanical lifetime	1,000,000 switching cycles



Further technical data on this item can be found in the product data sheet: [SSWTI](#)

Accessories

T22RRRT [↗](#) BSRR204 [↗](#)



→ SSWTI - Pushbutton

Series	SHORTRON®
Rubric	Pushbutton
Description	Pushbutton
Contact type	1NO
Mechanical lifetime	1,000,000 switching cycles



Further technical data on this item can be found in the product data sheet: [SSWTI](#)

Accessories

T22RRKL [↗](#) BSRR101 [↗](#)



→ SSWTLI - Pushbutton


Series	SHORTRON®
Rubric	Pushbutton
Description	Illuminated pushbutton
Contact type	1NO
Mechanical lifetime	1,000,000 switching cycles




Further technical data on this item can be found in the product data sheet: [SSWTLI](#)

Accessories

T22RRGB [↗](#) BSRR102 [↗](#)




Mounting

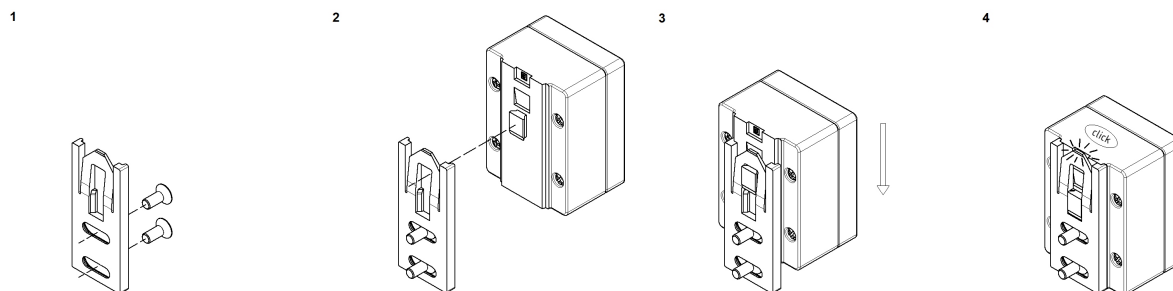

The mounting bracket is part of the delivery, the fixing material (screw, slot nuts) is not included. Please use M5 countersunk screws acc. to DIN 7991/ISO 10642 of appropriate length. The tightening torque for the screws to fix the mounting bracket is $0.7 \pm 0.1\text{Nm}$.

Dimensional drawing

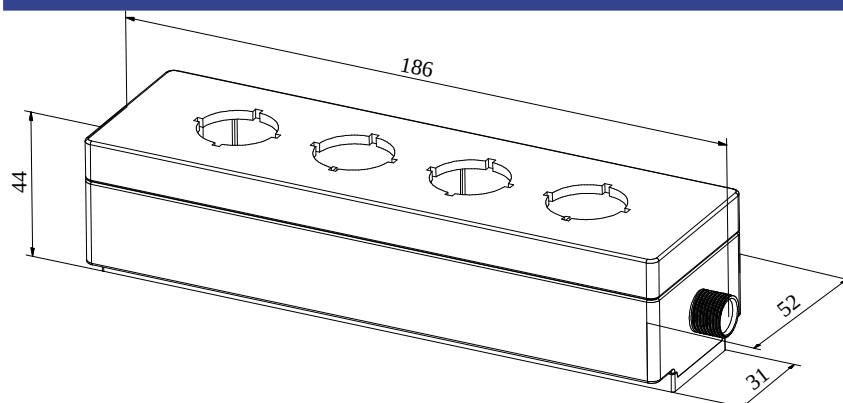

Pin assignment

Position	Connection	Contact	Pin	Cable color	Connection designation
4 SSWTI	1	NO	9	 Red	13
			10	 Violet	14
		LED	11	 Grey/Pink	X1 (+)
			12	 Red/Blue	X2 (-)
3 SSWTI	1	NO	7	 Black	13
			8	 Grey	14
2 SSWTI	1	NO	5	 Pink	13
			6	 Yellow	14
1 SSWTI	1	NO	1	 Brown	13
			2	 Blue	14
		LED	3	 White	X1 (+)
			4	 Green	X2 (-)

Images

