

# Datasheet

## → QXJNSG+SG-24V

09/30/2025



### Technical data

#### Buzzer

|           |                 |
|-----------|-----------------|
| Type      | QXJNSG+SG-24V   |
| Series    | QUARTRON-JUWEL® |
| Rubric    | Buzzer          |
| Approvals | CE, UKCA        |



### → General data

|                            |                                                  |
|----------------------------|--------------------------------------------------|
| Design                     | Square                                           |
| Labelling option           | No                                               |
| Operating temperature      | -20 °C ... 60 °C                                 |
| Panel cut-out              | 24 x 24 mm                                       |
| Mounting depth             | 55.7 mm                                          |
| Colour                     | Black/white                                      |
| Front bezel colour         | Black                                            |
| Weight                     | 21.18 g                                          |
| Storage temperature        | -30 °C ... 70 °C                                 |
| Degree of protection front | IP65                                             |
| Signal frequency           | 3,8 ± 0,5 kHz                                    |
| Signal volume              | max. 90 dB 10 cm, 24 V<br>max. 80 dB 10 cm, 12 V |

## → Electrical data

Supply voltage 12 V ... 24 V AC/DC


Supply operating current 5 mA DC 12 V  
16 mA DC 12 V

## → Mechanical data

Connection Faston terminals 2.8 mm x 0.8 mm

## Technical drawings

### → Dimensional drawing

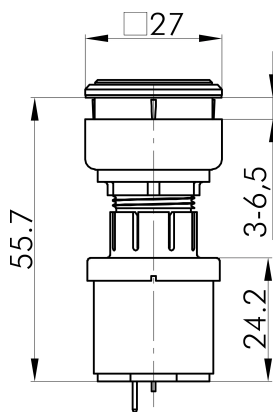

### → Cutout dimensions

