

Datasheet

→ QXJNSG+SGI-24V

09/30/2025



Technical data

Interval buzzer

Type	QXJNSG+SGI-24V
Series	QUARTRON-JUWEL®
Rubric	Buzzer
Approvals	CE, UKCA



→ General data

Design	Square
Labelling option	No
Operating temperature	-20 °C ... 60 °C
Panel cut-out	24 x 24 mm
Mounting depth	55.7 mm
Colour	Black/white
Front bezel colour	Black
Storage temperature	-30 °C ... 70 °C
Degree of protection front	IP65
Signal frequency	3,5 ± 0,5 kHz
Signal interval	1 s
Signal volume	max. 90 dB 10 cm, 24 V max. 80 dB 10 cm, 12 V

→ Electrical data

Supply voltage 12 V ... 24 V DC


Supply operating current max. 30 mA

→ Mechanical data

Connection Faston terminals 2.8 mm x 0.8 mm

Technical drawings

→ Dimensional drawing

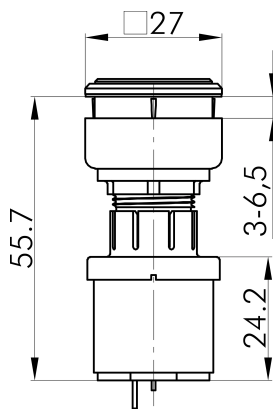

→ Cutout dimensions

