

Datasheet

→ QXJNSGL+SGILR

09/30/2025



Technical data

Illuminated interval buzzer

Type	QXJNSGL+SGILR
Series	QUARTRON-JUWEL®
Rubric	Buzzer
Approvals	CE, UKCA



→ General data

Design	Square
Illumination	Yes
Labelling option	No
Operating temperature	-20 °C ... 60 °C
Panel cut-out	24 x 24 mm
Mounting depth	55.7 mm
Colour	Black/red
Front bezel colour	Black
Degree of protection front	IP65
Signal frequency	3,5 ± 0,5 kHz
Signal interval	1 s
Signal volume	max. 90 dB 10 cm, 24 V max. 80 dB 10 cm, 12 V

→ Electrical data

Supply voltage 12 V ... 24 V DC


Supply operating current abt. 30 mA

→ Mechanical data

Connection Faston terminals 2.8 mm x 0.8 mm

Technical drawings

→ Dimensional drawing

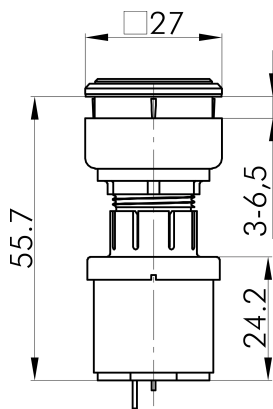

→ Cutout dimensions

