

Datasheet

→ RKNSG+SG-24V

09/23/2025



Technical data

Buzzer

Type RKNSG+SG-24V

Series OKTRON®-R

Rubric Buzzer

Approvals CE, UKCA



→ General data

Design Round

Labelling option No

Operating temperature -20 °C ... 60 °C

Panel cut-out Ø 16.2 mm

Mounting depth 43 mm

Colour Black/white

Front bezel colour Charcoal

Degree of protection front IP65

Signal frequency 3,8 ± 0,5 kHz

Signal interval 1 s

Signal volume max. 90 dB 10 cm, 24 V
max. 80 dB 10 cm, 12 V

→ Electrical data

Supply voltage 12 V ... 24 V DC


Supply operating current 5 mA DC 12 V
16 mA DC 24 V

→ Mechanical data

Connection Faston terminals 2.8 mm x 0.8 mm

Technical drawings

→ Dimensional drawing

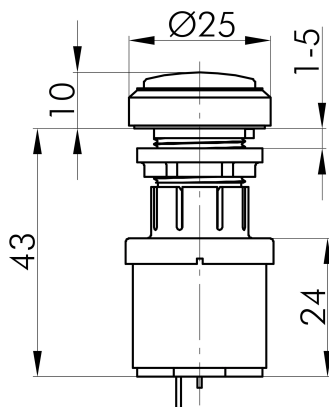

→ Cutout dimensions

