

Datasheet

→ RKNSGL+SGILR-24V

09/23/2025



Technical data

Illuminated interval buzzer

Type	RKNSGL+SGILR-24V
Series	OKTRON®-R
Rubric	Buzzer
Approvals	CE, UKCA



→ General data

Design	Round
Illumination	Yes
Labelling option	No
Operating temperature	-20 °C ... 60 °C
Panel cut-out	Ø 16.2 mm
Mounting depth	43 mm
Colour	Black/red
Front bezel colour	Charcoal
Degree of protection front	IP65
Signal frequency	3,5 ± 0,5 kHz

Signal interval	1 s
Signal volume	max. 90 dB 10 cm, 24 V max. 80 dB 10 cm, 12 V

→ Electrical data


Supply voltage	12 V ... 24 V DC
Supply operating current	abt. 30 mA

→ Mechanical data

Connection	Faston terminals 2.8 mm x 0.8 mm
------------	----------------------------------

Technical drawings

→ Dimensional drawing

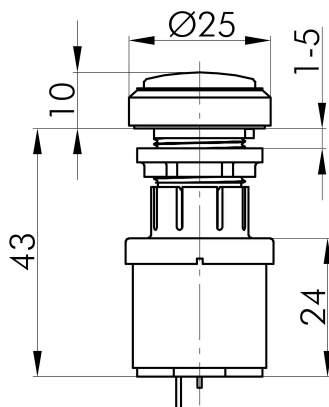

→ Cutout dimensions

