

# Datasheet

## → RRJVANSG+SGI-24V

09/30/2025



### Technical data

Interval buzzer

|           |                  |
|-----------|------------------|
| Type      | RRJVANSG+SGI-24V |
| Series    | Rontron-R-Juwel  |
| Rubric    | Buzzer           |
| Approvals | CE, UKCA         |



### → General data

|                            |                  |
|----------------------------|------------------|
| Design                     | Round            |
| Illumination               | No               |
| Labelling option           | No               |
| Operating temperature      | -20 °C ... 60 °C |
| Panel cut-out              | Ø 22.3 mm        |
| Mounting depth             | 48.6 mm          |
| Colour                     | Black/white      |
| Front bezel colour         | Stainless steel  |
| Storage temperature        | -30 °C ... 70 °C |
| Degree of protection front | IP65             |
| Signal frequency           | 3,5 ± 0,5 kHz    |

|                 |                                                  |
|-----------------|--------------------------------------------------|
| Signal interval | 1 s                                              |
| Signal volume   | max. 85 dB 10 cm, 24 V<br>max. 80 dB 10 cm, 12 V |

## → Electrical data


|                          |                  |
|--------------------------|------------------|
| Supply voltage           | 12 V ... 24 V DC |
| Supply operating current | max. 30 mA       |

## → Mechanical data

|            |                                  |
|------------|----------------------------------|
| Connection | Faston terminals 2.8 mm x 0.8 mm |
|------------|----------------------------------|

## Technical drawings

### → Dimensional drawing

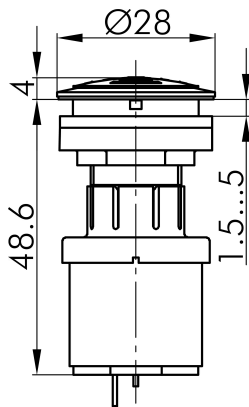

### → Cutout dimensions

