

Datasheet

→ RRJVANSGL+SGILR

09/30/2025



Technical data

Illuminated interval buzzer

Type	RRJVANSGL+SGILR
Series	Rontron-R-Juwel
Rubric	Buzzer
Approvals	CE, UKCA



→ General data

Design	Round
Illumination	Yes
Labelling option	No
Operating temperature	-20 °C ... 60 °C
Panel cut-out	Ø 22.3 mm
Mounting plate thickness	1,5 mm ... 5,0 mm
Mounting depth	48.6 mm
Colour	Black/red
Front bezel colour	Stainless steel
Storage temperature	-30 °C ... 70 °C
Degree of protection front	IP65
Signal frequency	3,5 ± 0,5 kHz

Signal interval	1 s
Signal volume	max. 85 dB 10 cm, 24 V max. 80 dB 10 cm, 12 V

→ Electrical data


Supply voltage	12 V ... 24 V DC
Supply operating current	max. 30 mA

→ Mechanical data

Connection	Faston terminals 2.8 mm x 0.8 mm
------------	----------------------------------

Technical drawings

→ Dimensional drawing

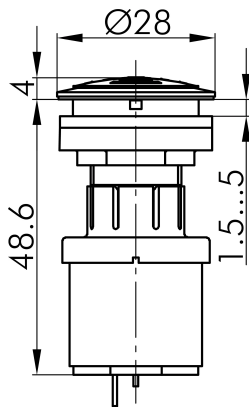

→ Cutout dimensions

