

# Datasheet

## → RRJVANSGL+SGLR24

09/30/2025



### Technical data

Illuminated buzzer

|           |                  |
|-----------|------------------|
| Type      | RRJVANSGL+SGLR24 |
| Series    | Rontron-R-Juwel  |
| Rubric    | Buzzer           |
| Approvals | CE, UKCA         |



### → General data

|                            |                                                  |
|----------------------------|--------------------------------------------------|
| Design                     | Round                                            |
| Illumination               | Yes                                              |
| Labelling option           | No                                               |
| Operating temperature      | -20 °C ... 60 °C                                 |
| Panel cut-out              | Ø 22.3 mm                                        |
| Mounting depth             | 48.6 mm                                          |
| Colour                     | Black/red                                        |
| Front bezel colour         | Stainless steel                                  |
| Storage temperature        | -30 °C ... 70 °C                                 |
| Degree of protection front | IP65                                             |
| Signal frequency           | 3,5 ± 0,5 kHz                                    |
| Signal volume              | max. 85 dB 10 cm, 24 V<br>max. 80 dB 10 cm, 12 V |

## → Electrical data

*Supply voltage* 12 V ... 24 V AC/DC


*Supply operating current* max. 30 mA

## → Mechanical data

*Connection* Faston terminals 2.8 mm x 0.8 mm

## Technical drawings

### → Dimensional drawing

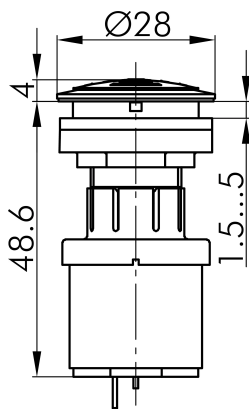

### → Cutout dimensions

