

Datasheet

→ RXJNSGL+SGLR-24V

09/24/2025



Technical data

Illuminated buzzer

Type	RXJNSGL+SGLR-24V
Series	RX-JUWEL
Rubric	Buzzer
Approvals	CE, UKCA



→ General data

Design	Round
Illumination	Yes
Labelling option	No
Operating temperature	-20 °C ... 60 °C
Panel cut-out	Ø 22.3 mm
Mounting depth	31.5 mm
Colour	Black/red
Front bezel colour	Charcoal
Weight	18.99 g
Degree of protection front	IP65

Signal frequency	3,5 ± 0,5 kHz
Signal volume	max. 85 dB 10 cm, 24 V max. 80 dB 10 cm, 12 V

→ Electrical data


Supply voltage	12 V ... 24 V AC/DC
Supply operating current	abt. 30 mA

→ Mechanical data

Connection	Faston terminals 2.8 mm x 0.8 mm
------------	----------------------------------

Technical drawings

→ Dimensional drawing

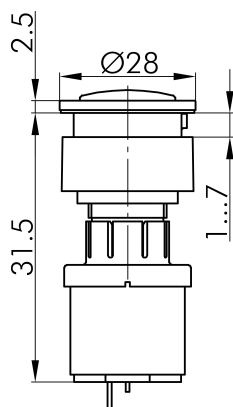

→ Cutout dimensions

