

Datasheet

→ **SVAWC** 

10/31/2024



Technical Data

Illuminated selector head, left maintained, right momentary

Series SHORTRON® intermediate structure

Rubric Selector head

Shape round



→ General Data

Illumination Yes

Protection class IP65

Mounting aperture Ø 22.3 mm

Front frame color Stainless steel, glossy

→ Mechanical Data

Switching function Momentary and maintained function


Switching position -60° maintained

0° Idle position


40° momentary

Technical Drawings

→ Dimensional drawing

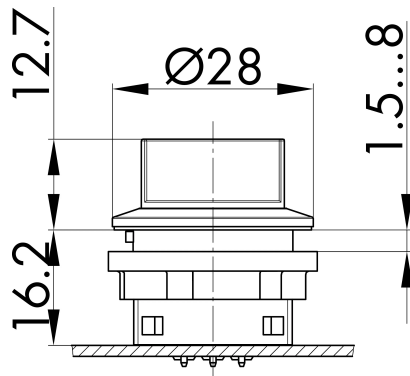

→ Cutout dimensions

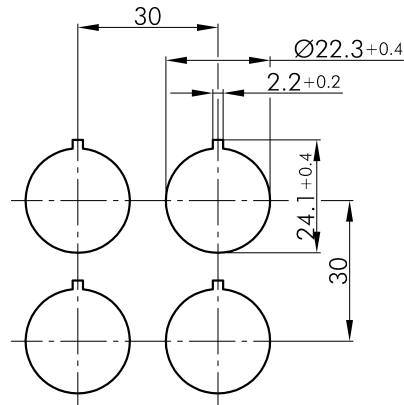

→ Position indicator

