

Datasheet

→ YMTLB

11/11/2025



Technical data

Illuminated pushbutton

Type	YMTLB
Series	mYnitron®
Rubric	Pushbutton
Approvals	CE, cURus, UKCA



→ General data

Design	Round
Illumination	Yes
Labelling option	Yes
Operating temperature	-25 °C ... 70 °C
Panel cut-out	Ø 16.2 mm
Mounting depth	18 mm
Lens colour	Blue
Front bezel colour	Silver-coloured
Contact material	Stainless steel 1.4310 gold-plated Snap dome CuZn37 gold-plated Counter contact
Storage temperature	-40 °C ... 80 °C
Standards	IEC/EN 60947-5-1
Grid spacing	25 x 25 mm
Degree of protection front	IP65 IP67

Note

- Labeling possible on request

→ Electrical data

Rated operating voltage IEC/EN 60947-5-1	35 V AC 35 V DC
Rated operating current IEC/EN 60947-5-1	0.1 A AC 0.1 A DC
Rated insulation voltage IEC/EN 60947-5-1	42 V AC 42 V DC
Contact resistance	< 100 mΩ NO new state
Electrical lifetime	500,000 switching cycles at rated voltage
Enclosure type information acc. to UL	Type 1
Utilisation category IEC/EN 60947-5-1	AC12 DC12
Contact type	1NO
Illuminant power	18 mA ... 22 mA
Illuminant	LED integrated
Illuminant connection	+ ...anode, - ...cathode
Operating voltage illuminant	10 V ... 32 V DC
Illuminant colour	White
Bouncing time	< 5 ms NO
Rating information acc. to UL	max. 30 V AC 42.4 V Peak 100 mA
Rating information acc. to UL	max. 30 V AC 42.4 V Peak 100 mA
Switching capacity	35 V 100 mA AC/DC

Breaking capacity IEC/EN 60947-5-1	1 W AC Ohmsche Last 1 W DC Ohmsche Last
---------------------------------------	--

Minimum voltage	20 mV
-----------------	-------

Current minimal	10 µA
-----------------	-------

Thermal continuous current IEC/EN 60947-5-1	100 mA AC 100 mA DC
--	------------------------

Overvoltage category	II
----------------------	----

Pollution degree	2
------------------	---

Note

- Use partially insulated blade receptacles (see accessories)

→ Mechanical data

Connection	Faston terminals connector 2,8 mm x 0,5 mm
------------	--

Operating travel	1 mm
------------------	------

Tightening torque fixing nut	max. 0.7 Nm
------------------------------	-------------

Mounting position	Any
-------------------	-----

Mechanical lifetime	500,000 switching cycles
---------------------	--------------------------

Switching function	Momentary function
--------------------	--------------------


Tactile	Yes
---------	-----

Note


- The blade terminals are not suitable for manual soldering!

Technical drawings

→ Dimensional drawing

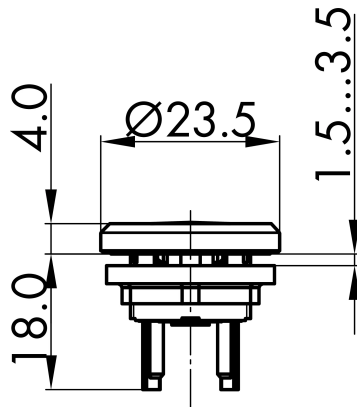

→ Cutout dimensions

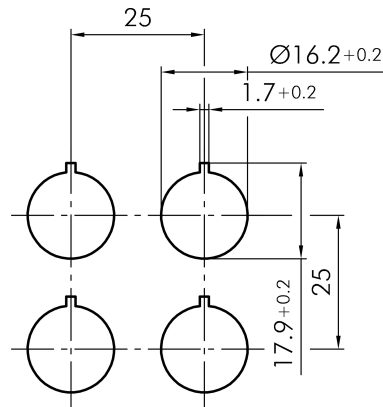

→ Circuit diagram

